


# C-STYLE SERIES

## CARVER Clamps | Product Overview


### Features:

Operation is very simple. The operator slides the spring loaded moveable jaw toward the workpiece to the nearest notch where it locks into the detent. Hand tightening the screw advances the clamp jaw. The jaw advances the tilting pad directly into contact with the workpiece – there is no rotating to twist the work or the clamp out of position.


An unusual and very useful feature of these clamps is the ability to use the clamp for spreading or locating as well as squeezing..




1. Loosen Screw



2. Push In Jaw Base



3. Slide Jaw Up or Down




4. Tighten Screw

## Technical Information | Holding Capacities

Holding Capacity	Throat Depth B1 [in] mm	Width Opening S [in] mm	Model	Clamping Screw Ø	Weight [lbs.] kg	Consisting of:	
						1 x	1 x
 [2,500 lbf] 11300N	[2.38] 60	[0-6] 0-150 [0-12] 0-300 [0-20] 0-500	<b>T186-6</b> <b>T186-12</b> ① <b>T186-20</b>	M12	[2.75] 1,4 [3.75] 1,8 [5.51] 2,5	186-6-1 186-12-1 186-20-1	186-2 186-2 186-2
 [1,270 lbf] 5650N	[4.7] 120	[0-10] 0-250	<b>T321-10</b>	M12	[4.4] 2,0	321-10-1	321-2
 [4,000 lbf] 18000N	[3.5] 90	[0-9] 0-225 [0-18] 0-450 [0-40] 0-1000	<b>T290-9</b> <b>T290-18</b> ① <b>T290-40</b>	M16	[10.00] 5,5 [13.50] 7,0 [23.15] 10,5	290-9-1 290-18-1 290-40-1	290-2 290-2 290-2
 [2,000 lbf] 9000N	[8.0] 200	[0-9] 0-225 [0-18] 0-450	<b>T285-9</b> <b>T285-18</b>	M16	[12.00] 7,1 [13.50] 8,5	285-9-1 285-18-1	285-2 285-2
 [6,000 lbf] 27000N	[4.5] 115	[0-24] 0-600 [0-36] 0-900	<b>T257-24</b> <b>T257-36</b>	M20	[27.50] 13,1 [32.50] 15,8	257-24-1 257-36-1	257-2 257-2

① Available upon request

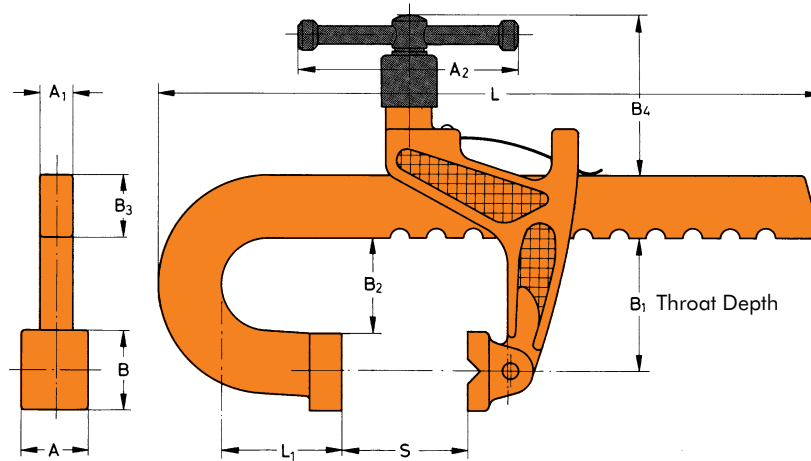

Model	[inch] mm								
	A	A1	A2	B	B2	B3	B4	L	L1
<b>T186-6</b>				[1.26] 32		[1.30] 33		[9.65] 245	[.79] 20
<b>T186-12</b>	[0.98] 25	[0.51] 13	[3.00] 76	[1.26] 38	[1.69] 43	[1.30] 33	[3.00] 76	[15.55] 395	[.79] 20
① <b>T186-20</b>				[1.38] 35		[1.18] 30		[24.61] 625	[1.18] 30
<b>T321-10</b>	[0.98] 25	[0.51] 13	[3.00] 76	[1.38] 35	[4.02] 102	[1.32] 33,5	[3.00] 76	[14.2] 360	[1.00] 25
<b>T290-9</b>								[16.53] 420	
<b>T290-18</b>	[1.57] 40	[0.79] 20	[5.51] 140	[2.36] 60	[2.56] 65	[1.57] 40	[4.13] 105	[25.78] 655	[2.56] 65
① <b>T290-40</b>								[47.44] 1205	
<b>T285-9</b>								[16.53] 420	
<b>T285-18</b>	[1.57] 40	[0.79] 20	[5.51] 140	[2.36] 60	[7.09] 180	[1.57] 40	[4.13] 105	[25.78] 655	[2.56] 65
<b>T257-24</b>								[33.46] 850	
<b>T257-36</b>	[2.00] 51	[0.87] 22	[7.36] 187	[2.36] 60	[3.35] 85	[2.00] 51	[5.00] 127	[45.87] 1165	[3.94] 100

① Available upon request


# BAR-STYLE SERIES

## CARVER Clamps | Product Overview


### Features:

These rugged clamps, made from high-tensile, heat-treated steel, are designed for all types of applications requiring large holding capacities from 1270 lbf to 6000 lbf (5650N to 27000N). The clamps are highly versatile. For example, jaws can be reversed to provide spreading action, or several jaws can be used on a single bar both for fixturing and positive component location and clamping.

Available models include T321 Standard-Duty Deep Throat, T285 Medium-Duty Deep Throat, T186 Standard-Duty, T290 Medium-Duty and T257 Heavy-Duty. In addition, standard and medium-duty connectors are available to couple like bars together for increased clamping reaches.





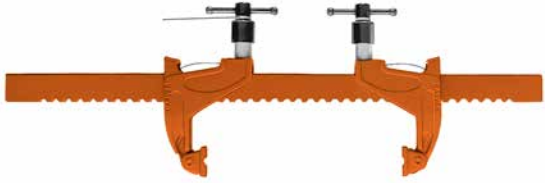


Model	For Bar Clamps Model	Weight [lbs.] kg
186-13	T186-... and T321-...	[1.54] 0,7
290-13	T285-... and T290-...	[2.87] 1,3



Connector


## Technical Information | Holding Capacities

Holding Capacity	Throat Depth	Width Opening S		Width Opening S1		Model	Clamping Screw Ø	Weight [lbs.] kg	Consisting of:	
		min	max	min	max				1x	2 x
 [2500 lbf] 11300N	[2.38] 60	[8.50] 215	[24] 600	[2.95] 75	[26.8] 680	T186-24	M12	[7.50] 3,4	186-24-1	186-2
			[36] 900		[39] 990	T186-36		[9.50] 4,4		
 [1270 lbf] 5650N	[4.7] 120	[5.50] 140	[24] 600	[3.15] 80	[27.2] 690	T321-24	M12	[7.70] 3,5	186-24-1	321-2
			[36] 900		[39.4] 1000	T321-36		[9.00] 4,5		
			[60] 1500		[63] 1600	T321-60		[13.00] 5,9		
 [4000 lbf] 18000N	[3.5] 90	[10.00] 250	[36] 900	[4.72] 120	[36.9] 1005	T290-36	M16	[20.50] 10,5	290-36-1	290-2
			[48] 1200		[63.8] 1620	Ⓢ T290-60		[28.50] 14,0		
			[60] 1500		[87.4] 2220	Ⓢ T290-84		[36.50] 18,0		
 [2000 lbf] 9000N	[8.0] 200	[6.00] 150	[36] 900	[4.72] 120	[42.7] 1085	T285-36	M16	[24.50] 10,5	290-36-1	285-2
			[48] 1200		[66.93] 700	Ⓢ T285-60		[32.50] 15,0		
			[60] 1500		[90.6] 2300	Ⓢ T285-84		[40.50] 19,0		
 [6000 lbf] 27000N	[4.5] 115	[12.00] 305	[84] 2100	[5.90] 150	[86.6] 2200	Ⓢ T257-84	M20	[61.00] 27,2	257-84-1	257-2

Ⓢ Available upon request

# BAR-STYLE SERIES

## CARVER Clamps | Dimensions

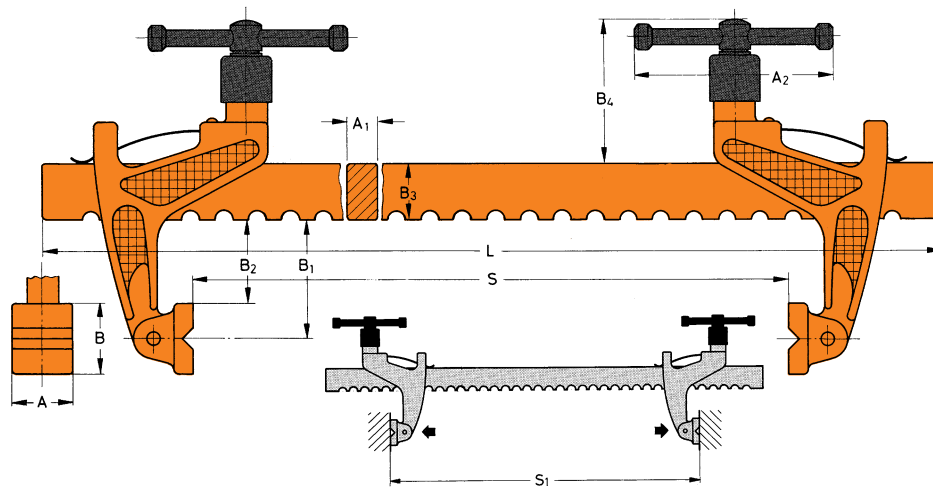

Model	[inch] mm							
	A	A1	A2	B	B2	B3	B4	L
T186-24								[28] 710
T186-36	[0.98] 25	[0.47] 12	[2.99] 76	[1.26] 32	[1.73] 44	[1.18] 30	[2.99] 76	[40.2] 1020
T321-24								[28] 710
T321-36	[0.98] 25	[0.47] 12	[2.99] 76	[1.26] 32	[4.09] 104	[1.18] 30	[2.99] 76	[40.2] 1020
T321-60								[64] 1625
T290-36								[42.1] 1070
① T290-60	[1.50] 38	[0.79] 20	[5.51] 140	[2.00] 51	[2.56] 65	[1.57] 40	[4.13] 105	[66.5] 1690
① T290-84								[90.2] 2290
T285-36								[42.1] 1070
① T285-60	[1.50] 38	[0.79] 20	[5.51] 140	[2.00] 51	[7.09] 180	[1.57] 40	[4.13] 105	[66.5] 1690
① T285-84								[90.2] 2290
① T257-84	[2.00] 51	[0.87] 22	[7.36] 187	[2.50] 63,5	[3.27] 83	[2.05] 52	[5.00] 127	[91.9] 2335

① Available upon request

# BUTTRESS SERIES




## CARVER Clamps | Product Overview

### Features:

These workholding clamps are designed for use on thin or low-profile workpieces replacing ordinary strap clamps. They feature a self-aligning swiveling pivot which allows the tightening bolt to always remain vertical, preventing any side forces. The two-point contact offered by Models T614-0 and T614-1 also provides greater stability to the workpiece. Ideally suited for manual die clamping. Eliminates the need for step blocks or riser blocks.





### Technical Information, Holding Capacities

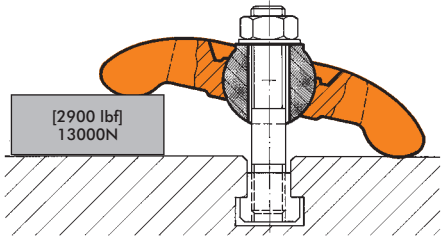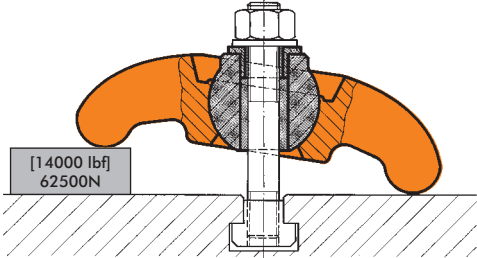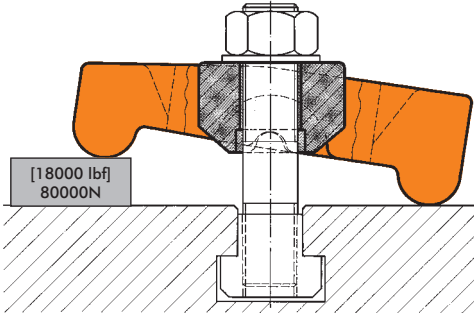Holding Capacity	Working Height Range	For screw diameter	Model	Weight [lbs.] kg
	[0-1.75"] 0-45	[1/2"] M12	T614-0	[1.5] 0,6
	[0-2.25"] 0-57	[5/8"] M16 or [3/4"] M20	T614-1	[5.8] 2,7
	[0-3.00"] 0-75	[1"] M24	T614-2	[9.5] 4,3



# BUTTRESS SERIES

## CARVER Clamps | Dimensions



Holding capacity [2900 lbf] 13kN  
Clamping height [1.75] 45mm max.  
**Model T614-0**

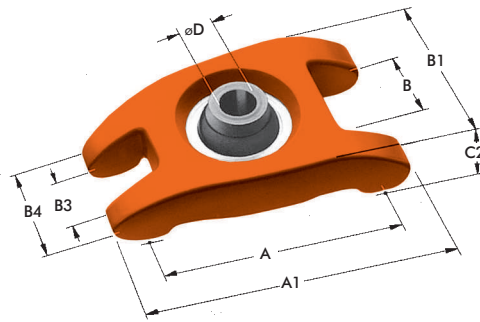

Holding capacity [14000 lbf] 62.5kN  
Clamping height [2.25] 57mm max.  
**Model T614-1**  
Delivery includes reducing bush with inner diameter 17 [0.67].  
Reducer bushing is standard equipment

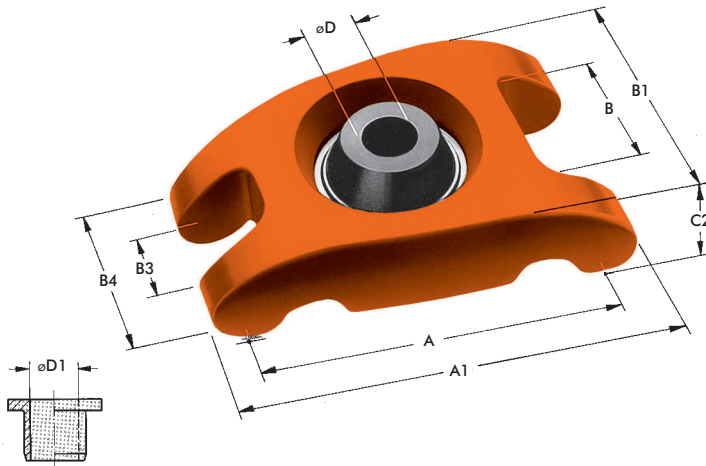

Holding capacity [18000 lbf] 80kN  
Clamping height 75 [3.00] max.  
**Model T614-2**

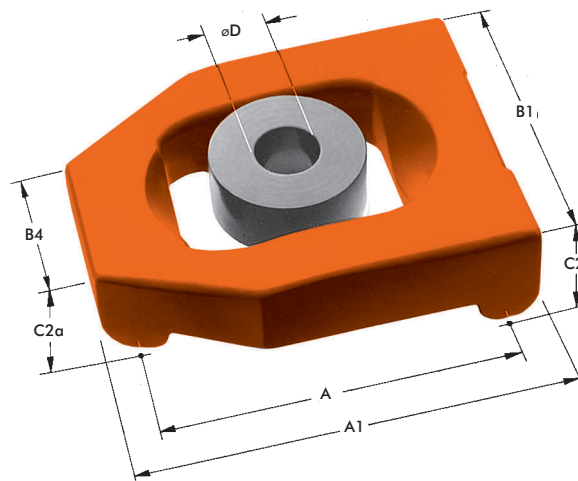

Model	[inch] mm									
	A	A1	B	B1	B3	B4	C2	C2a	ØD	ØD1
<b>T614-0</b>	[3.54] 90	[4.34] 110	[1.41] 36	[2.59] 66	[0.78] 40	[1.56] 40	1.02] 26	–	[0.51] 13	–
<b>T614-1</b>	[5.28] 134	[6.31] 160	[2.09] 53	[3.94] 100	[1.14] 29	[2.56] 65	[1.81] 46	–	[0.83] 21	[0.67] 17
<b>T614-2</b>	[5.83] 148	[6.69] 170	–	[5.13] 130	–	[2.56] 65	[1.97] 50	[1.57] 40	[1.02] 26	–

# T-SLOT SERIES

## CARVER Clamps | Product Overview

### Features:

These clamps provide rapid height adjustment and positive holding. They are designed with a single-unit clamp head and base. The DESTACO Carver T-Slot Clamp is one single assembly – there are no loose parts. When setting up, the safety lock on the back is released and the clamp lifted on the base to the desired height. When the clamp screw is turned, 100% of the force is transmitted to the work-piece. Backing off the clamp adjusting screw and releasing the safety lock and lifting the clamp head makes for rapid job changeover.







If the clamping height is more than [29.5in] 750mm the connector shown below will be delivered as standard equipment.

### MODEL T813400



## Technical Information | Holding Capacities

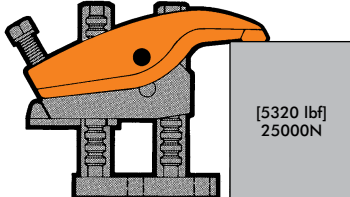Holding Capacity	Throat Depth		Working Height C		Model	Max. Torque	Accessories Standard Equipment	Weight [lbs.] kg
	a	b	min.	max.				
 [5100 lbf] 22700N	[0.55] 14	[1.30] 33	[0.50] 12	[4.00] 100	T400-4	[36 ft. lbs.] 49Nm	(2) M12 T-nuts for 14mm T-slot T2060-05	[5.1] 2,3
			[0.50] 12	[6.00] 150	T400-6			[5.5] 2,5
			[2.00] 50	[8.00] 200	T400-8			[5.7] 2,6
 [3600 lbf] 16000N	[2.24] 57	[2.87] 73	[0.50] 12	[4.00] 100	T600-4	[30 ft. lbs.] 40Nm	(2) M12 T-nuts for 14mm T-slot T2060-05	[5.9] 2,7
			[0.50] 12	[6.00] 150	T600-6			[6.4] 2,9
			[2.00] 50	[8.00] 200	T600-8			[6.6] 3,0
 [8160 lbf] 36300N	[1.73] 44	[2.68] 68	0	[6.00] 150	T402-6	[85 ft. lbs.] 115Nm	(2) M16 T-nuts for 18mm T-slot T2060-07	[14.00] 6.4
			0	[12.00] 300	T402-12			[17.70] 8.0
			[6.00] 150	[18.00] 450	T402-18			[19.40] 8.8
			[12.00] 300	[24.00] 600	① T402-24			[20.00] 9.0
 [5320 lbf] 25000N	[3.90] 99	[4.84] 123	0	[6.00] 150	T602-6	[70 ft. lbs.] 95Nm	(2) M16 T-nuts for 18mm T-slot T2060-07	[16.00] 7.3
			0	[12.00] 300	T602-12			[19.80] 9.0
			[6.00] 150	[18.00] 450	① T602-18			[21.60] 9.8


① Available upon request





These clamps provide rapid height adjustment and positive holding. They are designed with a single-unit clamp head and base, providing up to [8000 lbf] 35.6kn. of positive holding capacity for workpieces up to 60" high. The design applies 100% of the screw

force directly onto the workpiece far more than any strap clamp arrangement. Additionally, there is no searching for the correct riser block height. The DESTACO Carver T-Slot Clamp is one single assembly – there are no loose parts.

When setting up, the safety lock on the back is released and the clamp lifted on the base to the desired height. When the clamp screw is turned, 100% of the force is transmitted to the workpiece. Backing off the clamp adjusting screw and releasing the safety lock and lifting the clamp head makes for rapid job changeover.

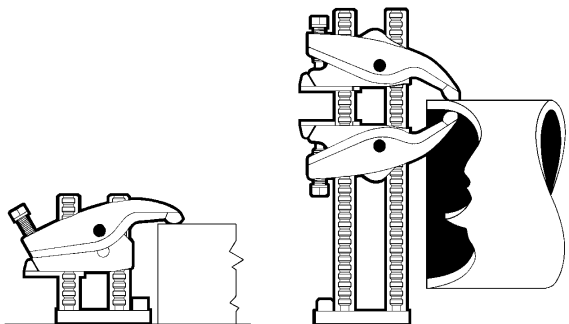

Ideal for use as manual die clamps. Eliminates the need for step blocks or riser blocks.

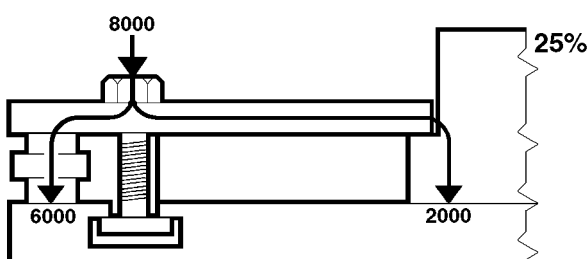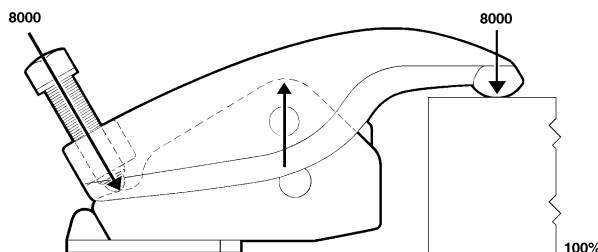

Safety – No loose parts. Clamp and base are one unit.

Higher clamping force holds parts more securely and safely.


Speed – The clamp head adjusts much faster than an operator can select proper size spacers and bolts. Benefits include:

- Cuts set-up time by as much as 80%
- Reduces machine downtime
- Offers more rapid loading and unloading



Economy – Tool tip technology and digital control have reduced machining time. Why lose these advantages on long set-up times? T-Slot clamps can reduce set-up time by as much as 80%. Benefit: Money saved.

Ease of Operation – Loosen adjusting screw and release safety catch to adjust height instantly.

Versatility - Selection of bases gives standard clamping heights from 0 to 600mm[0 to 24in.]. Additional heights available up to 1500mm[60in.] are available upon request. Two or more heads can be used on one base to position and hold down as well as support – ideal for fine height adjustment during set-up. Also eliminates riser blocks.

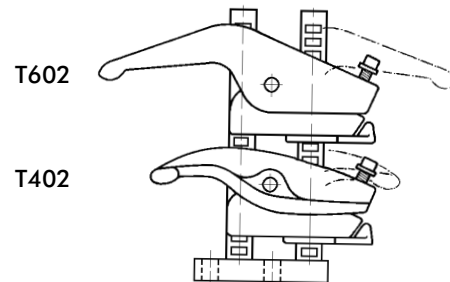


The T402 and T602 can be reversed on their bases to give added reach.

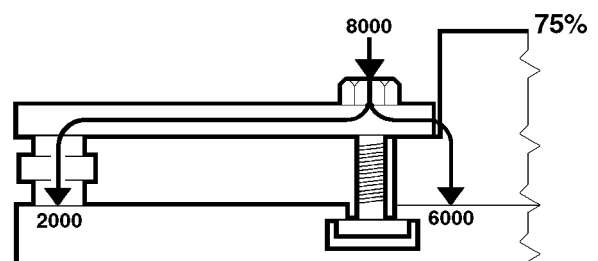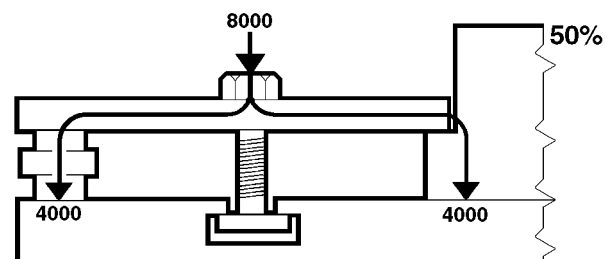




# T-SLOT SERIES


## CARVER Clamps | Dimensions

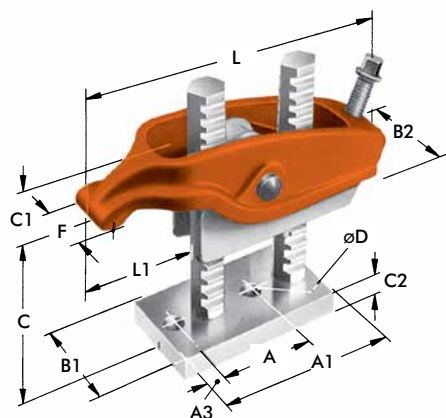

Model **T400-..**

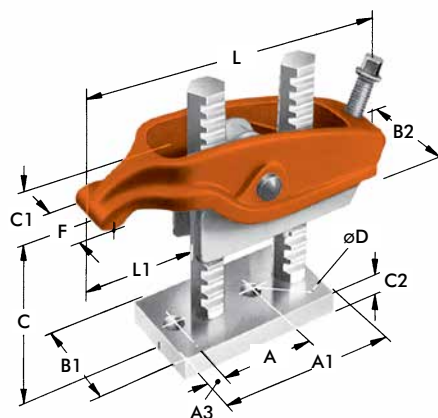

Model **T402-..**

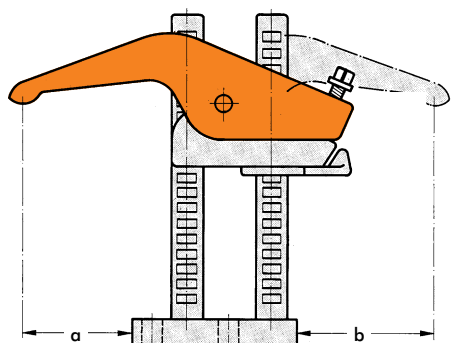


If the T402 is reversed on its base, the measurement of the throat depth will change.

	T400-..	T402-..
a	[0.55] 14	[1.73] 44
b	[1.30] 33	[2.68] 68


Model	A	A1	A3	B1	B2	C min	C max	C1	C2	ØD	F	L	L1	Consisting of 1x	1x	Clamping Screw Size Ø
<b>T400-4</b>						[1.00] 25	[4.00] 100								400-4-1	12mm
<b>T400-6</b>	[2.12] 54	[3.78] 96,2	[0.41] 10,5	[2.00] 51	[2.00] 51	[1.00] 25	[6.00] 150	[1.09] 28	[0.63] 16	[0.53] 13,5	[1.02] 26	[6.30] 160	[1.44] 36,5	400-2	400-6-1	
<b>T400-8</b>						[2.50] 62	[8.00] 200								400-8-1	
<b>T402-6</b>						0	[6.00] 150								402-6-1	20mm
<b>T402-12</b>						0	[1200] 300								402-12-1	
<b>T402-18</b>	[2.81] 71	[5.51] 140	[0.59] 15	[3.00] 76	[2.68] 68	[6.00] 150	[18.00] 450	[1.77] 45	[0.75] 19	[0.66] 16,3	[1.50] 38	[9.65] 245	[2.56] 65	402-2	402-18-1	
<b>① T402-24</b>						[12.00] 300	[24.00] 600								402-24-1	

① Available upon request

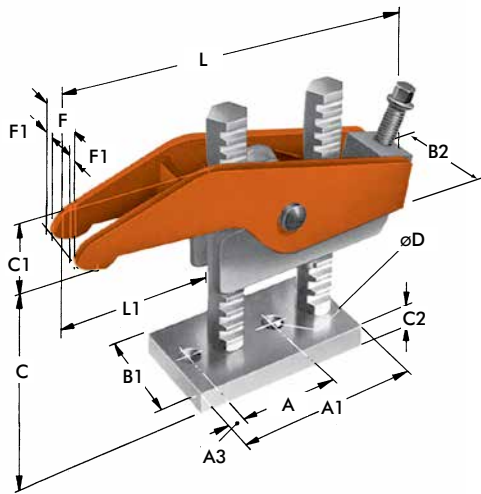


Model

T600-..

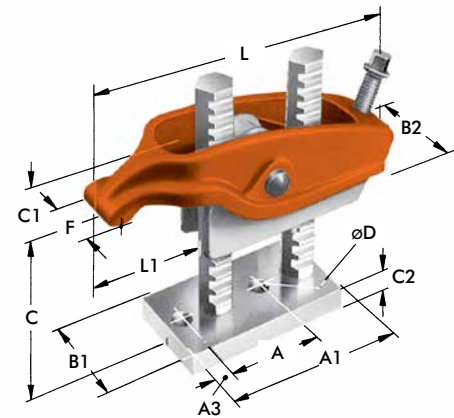

Model T602-..

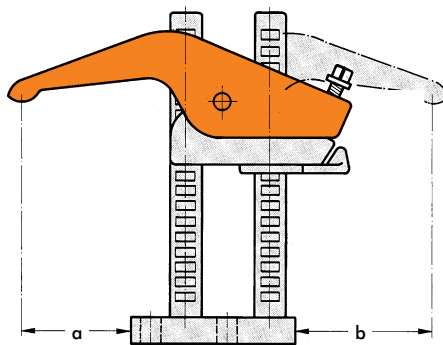

If the T602 is reversed on its base, the measurement of the throat depth will change.

	T600-..	T602-..
a	[2.24] 57	[3.90] 99
b	[2.87] 73	[4.84] 123

Model	A	A1	A3	B1	B2	C		C1	C2	ØD	F	F1	L	L1	Consisting of		Clamping Screw Size Ø
						min	max								1x	1x	
T600-4						[0.47] 12	[4.00] 100									600-4-1	12mm
T600-6	[2.12] 54	[3.78] 96,2	[0.41] 10,5	[2.00] 51	[1.97] 50	[0.47] 12	[6.00] 150	[1.50] 38	[0.63] 16	[0.53] 13,5	[1.97] 50	[0.41] 10,5	[7.88] 200	[3.35] 85	600-2	600-6-1	
T600-8						[1.97] 50	[8.00] 200									600-8-1	
T602-6						0	[6.00] 150									402-6-1	20mm
T602-12	[2.81] 71	[5.51] 140	[0.59] 15	[3.11] 79	[3.11] 79	0	[1200] 300	[3.19] 81	[0.75] 19	[0.66] 16,3	[1.50] 38	-	[12.40] 315	[5.31] 135	602-2	402-12-1	
① T602-18						[6.00] 150	[18.00] 450									402-18-1	

① Available upon request